

# "GEAR PUMPS"

## Suitable for Water, Oil & Various Liquids Applications



GB-13  
GC-13



GB-25  
GC-25

### Applications (GB)

- Water
- Sea water
- Weak acids
- Various chemicals
- Coal tar




### Applications (GC)

- Kerosene
- Light oil
- Machine oil
- Heavy oil
- Water



### Performance Curve

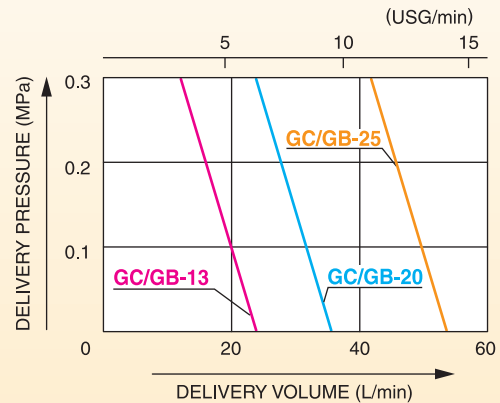

### Specification

Model	GC-13	GB-13	GC-20	GB-20	GC-25	GB-25
Gear Material	GC: Cast Iron / GB: Brass					
Connection Dia	13 mm (½")		20 mm (¾")		25 mm (1")	
Delivery Volume (400 rpm)	21 L/min (5 USG/min)		37 L/min(9 USG/min)		55 L/min (14 USG/min)	
Delivery Pressure	0 - 0.3 MPa (0 - 3 kg/cm <sup>2</sup> )					
Max. Suction Lift	Max. 4 m (13.1 ft)					
Power	200 W		400 W		750 W	
Pulley	5" (125mm) × A1		6" (150mm) × A1		8" (200mm) × A1	
Net Weight	4 kg (8.8 lbs) (1 unit)		6 kg (13.2 lbs) (1 unit)		11 kg (24.3 lbs) (1 unit)	
Gross Weight	17.5 kg (38.6 lbs) (4 units)		25 kg (55.1 lbs) (4 units)		22.5 kg (49.6 lbs) (2 units)	
Dimensions LxWxH (mm)	391 × 236 × 167		482 × 252 × 179		402 × 267 × 250	
Packing Unit	4				2	